

# B508002



### ▶ 主要技术特性 (Main Specifications)

- ▶ 适用导线规格 (Applicable wire) : AWG22#~18#
- ▶ 适用基板厚度 (Applicable PC board thickness) : 1.6mm
- ▶ 温度范围 (Temperature range) : -25°C~+85°C
- ▶ 额定电压 (Voltage rating) : 250V AC, DC
- ▶ 额定电流 (Current rating) : 10A AC, DC
- ▶ 接触电阻 (Contact resistance) :  $\leq 0.02\Omega$
- ▶ 绝缘电阻 (Insulation resistance) :  $\geq 1000M\Omega$
- ▶ 耐压 (Withstanding voltage) : 1500V AC/minute

### 材料及电镀规格 Material and Finish


型号 Type	材料 Material	材料厚度 Material Thickness	电镀规格 Finish
插座 WAFER	塑胶 HOUSING	PA66 UL94V-0	N/A
	针PIN	黄铜 Brass	镀锡 Tin-plated
孔座 HOUSING	PA66 UL94V-0	—	N/A
端子 TERMINAL	锡青铜 Phosphor bronze	0.25mm	镀锡 Tin-plated

### 产品尺寸图 Product size chart


 单位: mm 一般公差:  $\pm 0.20$ 

### TERMINAL

B396001-4 VH

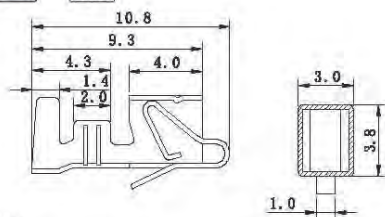


### 安装尺寸 (Mounting measurement)

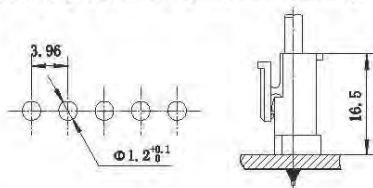


### HOUSING

B508002-2-02 1744036-2




B508002-2-05 1744036-5

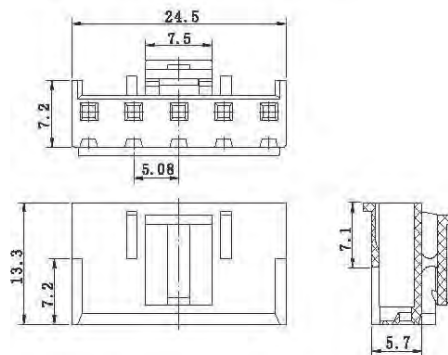


### WAFER

B508002-1-02 1744037-2

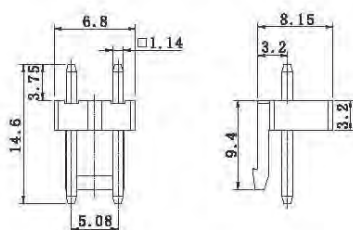

B508002-1-05 1744037-5

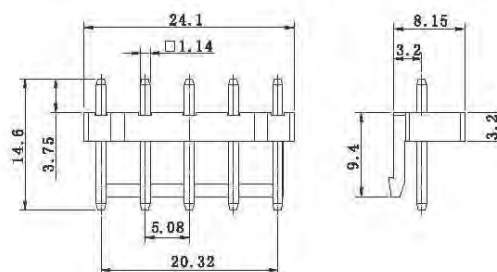


# B508002

WAFER

B508002-1-02B

1744037-2B



B508002-1W-05

1744037-5AW

